

SERIE 7S


For tractors 120–200 hp

Industrial



SERIE 7S

A (mm)	3.780
B (mm)	4.100
C (mm)	4.820
D (mm)	5.210
E (mm)	310

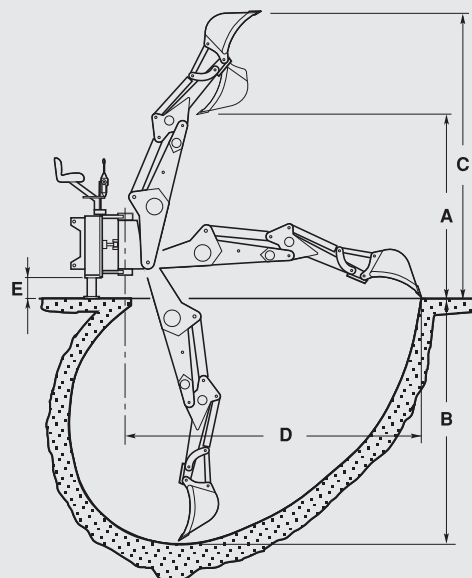

SERIE 7S

Digging depth mm	4.100
Rotation angle	180°
Moving frame width mm	2.000
Weight kg	1.190
Oil tank L	60
Standard bucket mm	300 (30 l)
Tooth tearing resistance kg	2.600
Digging force with auxiliary boom kg	2.100

Technical features and standard equipment

- Sideshifting backhoe with hydraulic locking, applicable to the three-point hitch of the hydraulic boom
- 180° central rotation by 1 cylinder (patented)
- Independent hydraulic stabilisers with block valves
- Independent system with 44 cm³/rev., pump, multiplier, 60-lt built-in tank, oil strainer and hydraulic oil
- Element distributor with 60 lt/1' flow rate, control levers and built-in shock-absorbing anti-cavitation valves
- Flow rate 70 l/min
- Max working pressure: 190 bar
- Standard bucket: 300 mm
- Boom locking tensioners
- Joints with pins and bushes of case-hardened and tempered steel
- Chrome-plated double-liner cylinder rods
- Sanding and polyester powder coating
- Stiffening tractor frame category 1 and 2
- Telescopic boom

Accessories on request

- Installation I: hydraulic mulcher
- Hydraulic mulcher 800 mm T1 80 REV

Special equipment

- Special equipment: upgraded pump 70 l/min, electric switch, distributor with 8 elements, two ½" additional lines at the jib end



Stiffening tractor frame
Category 1 and 2 - Included

Terminal tools



BUCKET

250 mm
300 mm
400 mm
500 mm
600 mm
700 mm




DITCH CLEANING BUCKET

800 mm
1000 mm
1200 mm



45° TITLING BUCKET

1000 mm
1200 mm



TRAPEZOIDAL BUCKET

740 mm



GRAB

175 dm³



MULTIPURPOSE FORK

800 mm



HYDRAULIC ROTATOR

BR35



HYDRAULIC HAMMER

96 kg



AUGER

TR2



DRILL BITS (Ø x lg.1000 mm)

150
200
250
300
400